Test Report

No. F690101/LF-CTSAYAA19-39927 Issued Date: 2019. 07. 04

SHIN SUNG CO., LTD.
468-7, Dochoek-ro, Docheok-myeon
Gwangju-si, Gyeonggi-do
Korea

The following sample(s) was/were submitted and identified by/on behalf of the client as:-

SGS File No.	:	AYAA19-39927
Product name	:	POLYPROPYLENE MULTI-FILAMENT YARN
Item No./Part No.	:	840D/144F BLACK
Received Date	:	2019. 06. 27
Test Period	:	2019. 06. 27 to 2019. 07. 04
Test Result(s)	:	For further details, please refer to following page (s)

SGS Korea Co., Ltd.

Chris Jeong / Technical Manager

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s).

SGS Korea Co., Ltd. | 322, The O valley, 76, LS-ro, Dongan-gu, Anyang-si, Gyeonggi-do, Korea 14117
t +82 (0)31 4608 000 f +82 (0)31 4608 059 http://www.sgsgroup.kr

Sample No. : AYAA19-39927.001

Sample Description : POLYPROPYLENE MULTI-FILAMENT YARN

Item / Part No. : 840D/144F BLACK

Material : POLYPROPYLENE


Test Item	Test Method	Unit	Test Result
Fogging (G)	Ref. GMW3235:2016 B-Y1-T2	mg	2.60

<Note 1> Fogging (G) Test conditions
- Pre-Drying: over 24 h
- Duration: 18 h
- Temperature of the oil bath: 100 ℃
- Temperature of the cooling plates: 21 ℃
- Post-Drying: 24 h

<Note 2> Weight of Sample: (10 ± 0.2) g

<Note 3> The test was conducted by client's request.

Picture of Sample as Received :

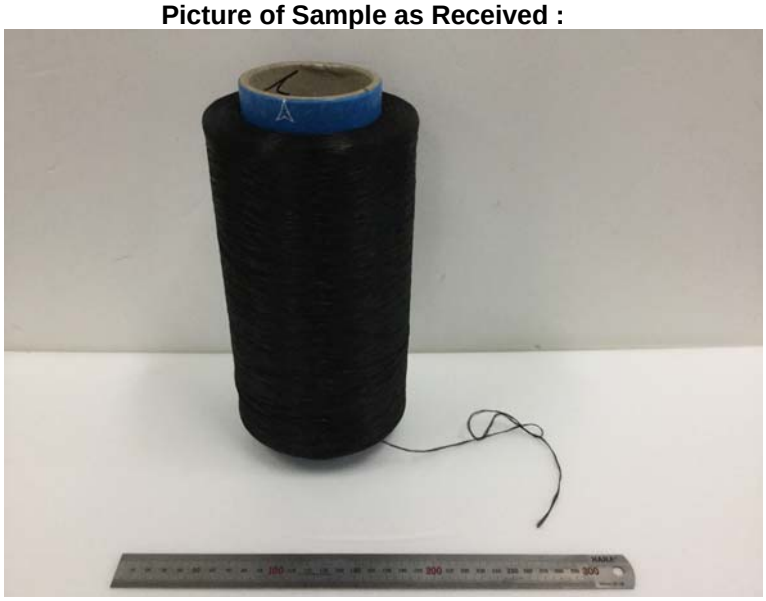

AYAA19-39927.001

*** End of Report ***

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s).

SGS Korea Co., Ltd. 322, The O valley, 76, LS-ro, Dongan-gu, Anyang-si, Gyeonggi-do, Korea 14117
t +82 (0)31 4608 000 f +82 (0)31 4608 059 http://www.sgsgroup.kr

Member of the SGS Group (Société Générale de Surveillance)