(28115) 21, Yangcheong 3-gil, Ochang-eup, Cheongwon-gu, Cheongju-si Chungbuk, Korea
Tel : 043-711-8875 Fax : 043-711-8804

TEST REPORT

APPLICANT : SHIN SUNG CO., LTD.
BUYER'S NAME : [redacted]

REPORT NO. : M220-20-15987
SAMPLE RECEIVED DATE : 2020-10-20
TEST PERIOD : 2020-10-20~2020-11-02
REPORT ISSUED DATE : 2020-11-02
PAGE : 1 OF 2

SAMPLE DESCRIPTION : ONE(1) SAMPLE

==========

SAMPLE NAME SUBMITTED BY THE APPLICANT : PP WEBBING 1" BLACK

==========

TEST CONDUCTED : As requested by the applicant, for details please see attached page(s).

==========

PREPARED AND CHECKED BY
FOR FITI

HONG-KWAN KIM
QUALITY MANAGER

AUTHORIZED BY
FOR FITI

JE-GOO JUN
PRESIDENT

※ Report Verification No.: [redacted]
(You can see the authenticity of your test report through the above "Report Verification No." at FITI homepage.)

e-DOCUMENT SERVICE

The test results contained in this report are limited to results on the sample(s) that is provided by client and are not necessarily indicative or representative of the qualities of the lot from which the sample(s) was taken or of all products. Results contained in this report are not based on the quality certification of sample by the FITI quality certification program unless specifically requested by the client. Further use of the results of this report is prohibited unless allowed under a separate agreement set forth in an official document that is established between the client identified on this letter and the FITI.
This test report is irrelevant to KS Q ISO/IEC 17025 and KOLAS accreditation.

(28115) 21, Yangcheong 3-gil, Ochang-eup, Cheongwon-gu, Cheongju-si Chungbuk, Korea
Tel : 043-711-8875 Fax : 043-711-8804

01. FLAMMABILITY (MS300-08 : 2014)

#1			
Specimen condition	state	Laboratory condition	state
Date	2020.10.29 ~ 2020.10.30	Date	2020.10.30
Temperature	(21 ± 5) ℃	Temperature	(21 ± 5) ℃
Relative humidity	(55 ± 5) %	Relative humidity	(55 ± 5) %
Test time	24 h	Weather	-


■ TEST RESULT

Spcimen No.	state		
	Length of burnt portion (mm)	Burning time (s)	Burn rate (mm/min)
1	0	0	SE
2	0	0	SE
3	0	0	SE
4	0	0	SE
5	0	0	SE
Maximum	-	-	-
Average	-	-	-
Requirement	・ BURNING RATE(MAX) ≤ 80 mm/min OR EXTINGUISHED WITHIN 60 s, 50 mm		
Conclusion	PASS		

NOTE) SE = SELF EXTINGUISHING
THE TEST CONDUCTED ONLY IN THE STATE THE CLIENT'S REQUEST.

** End of The Report **

- SAMPLE PHOTO -

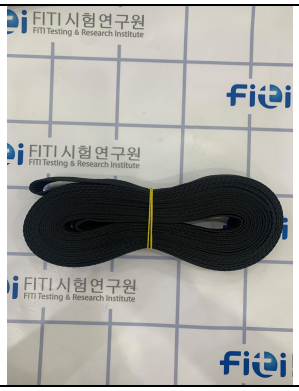

e-DOCUMENT SERVICE
The test results contained in this report are limited to results on the sample(s) that is provided by client and are not necessarily indicative or representative of the qualities of the lot from which the sample(s) was taken or of all products. Results contained in this report are not based on the quality certification of sample by the FITI quality certification program unless specifically requested by the client. Further use of the results of this report is prohibited unless allowed under a separate agreement set forth in an official document that is established between the client identified on this letter and the FITI.
This test report is irrelevant to KS Q ISO/IEC 17025 and KOLAS accreditation.